




1. Install flush main body and flush bottom.



Suggest using this kind of wrench to install, and the wrench should be provided by yourself.

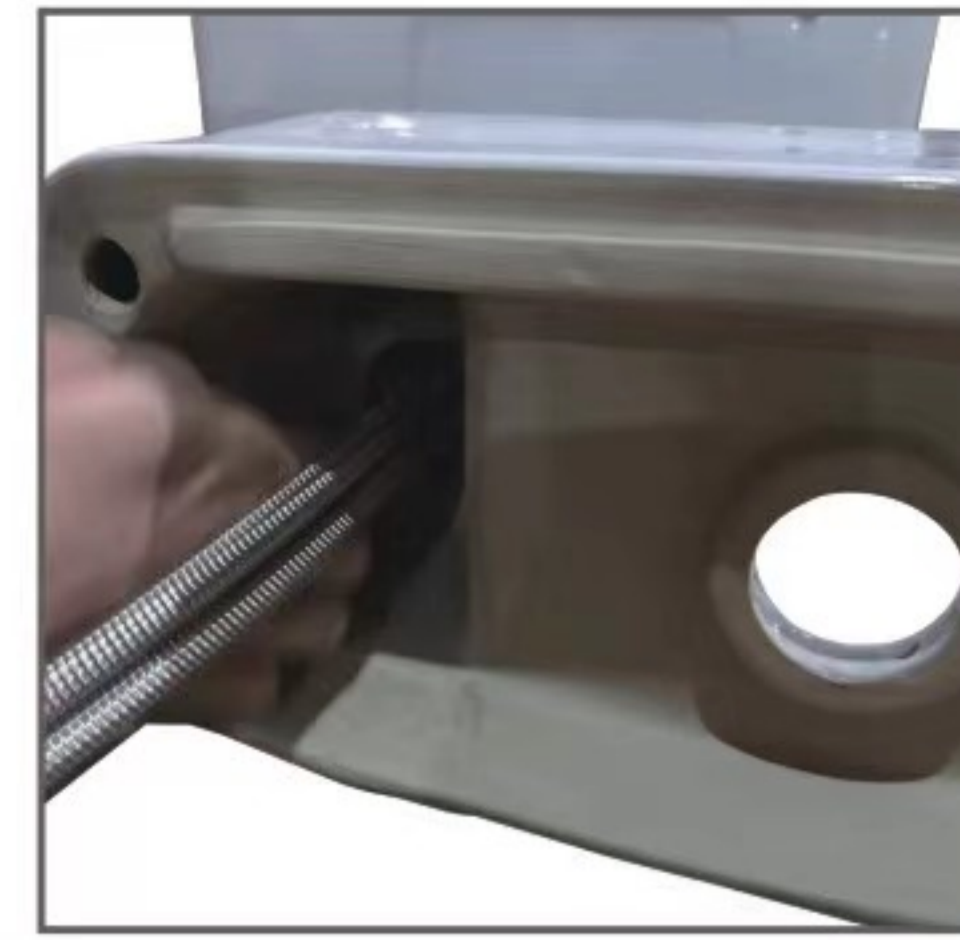



2-5: Install the faucet on the basin and connect the inlet pipe.



6. The faucet pipe connected to the inlet pipe of the flush fitting.




7. Then put the flush fitting into the cistern and lock it.

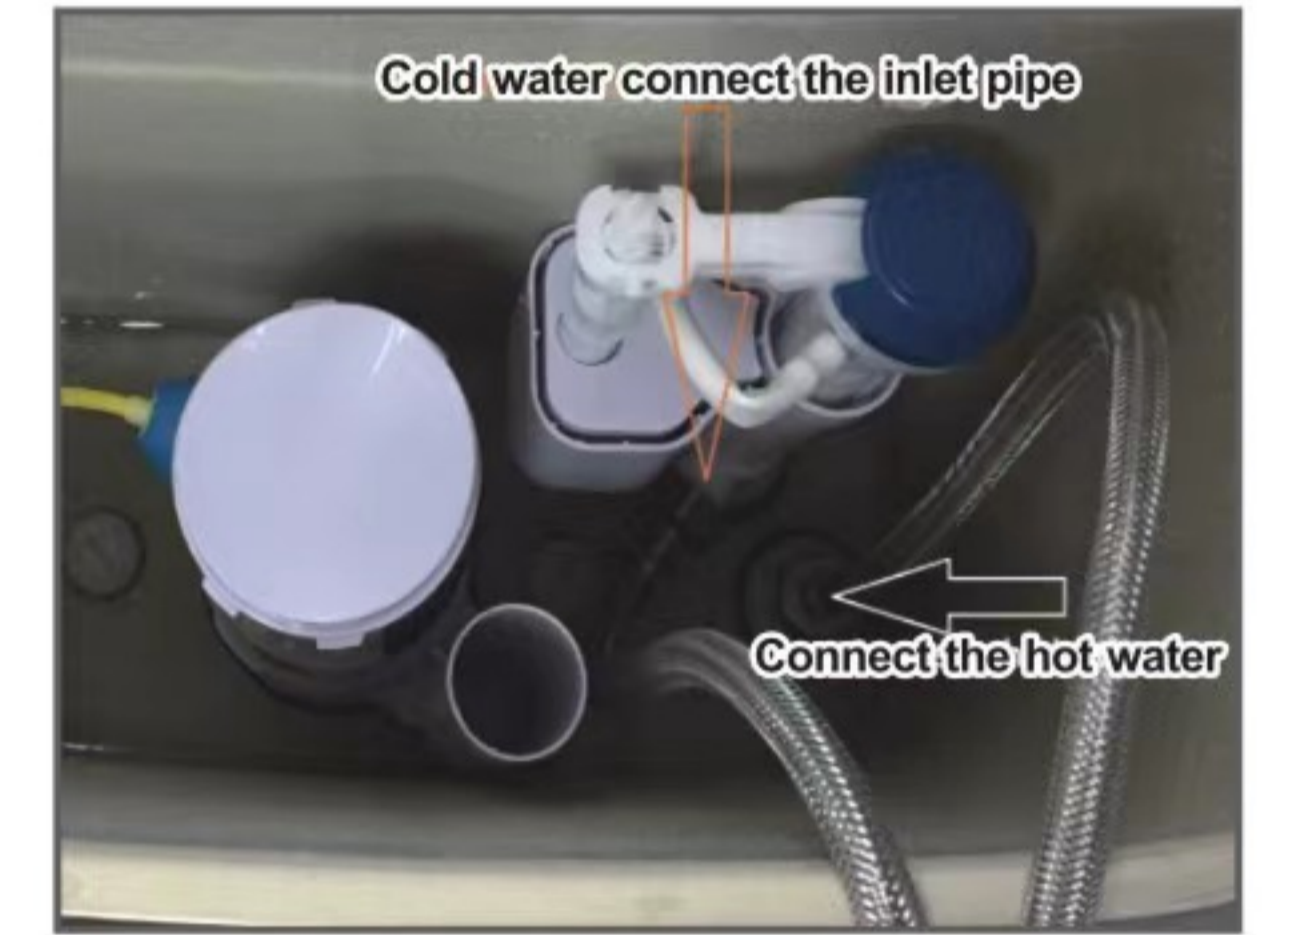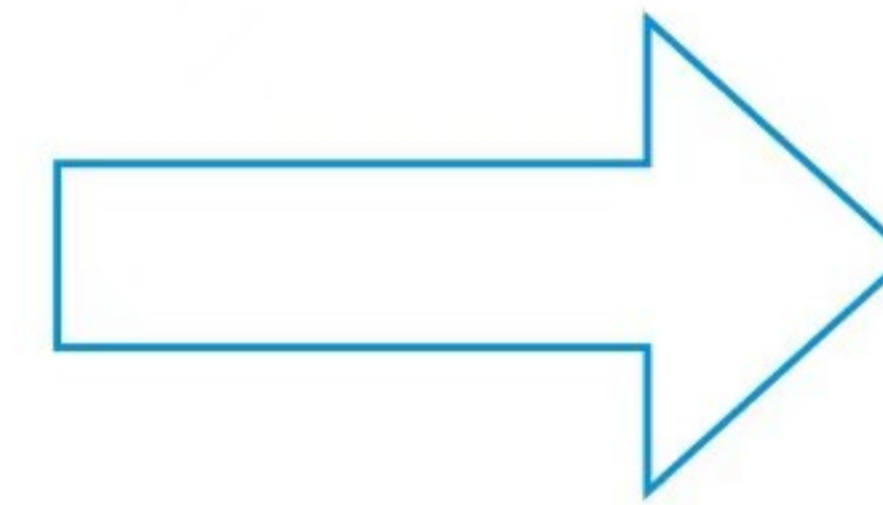

Inside like it



8. Put the cistern on the toilet pan, and lock the screw.

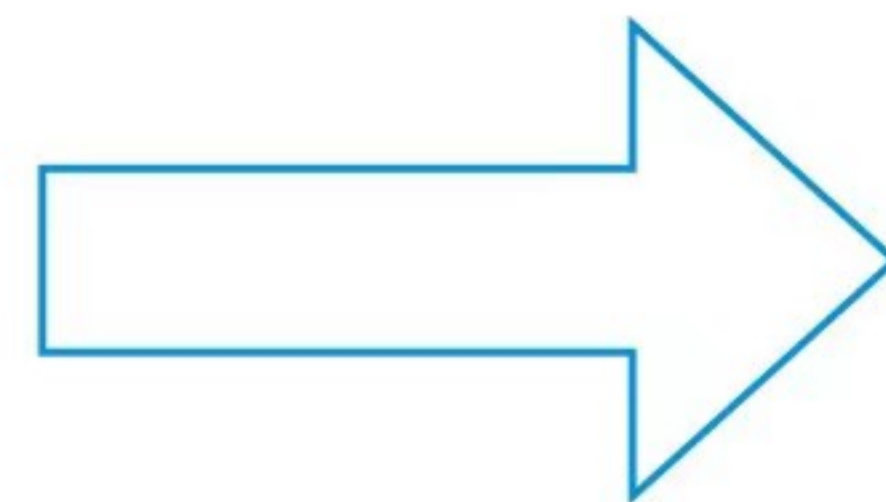

the complete back



9. Then connect the tap water, and the installation is complete.